

OZ WEST
FENCING & GATES



ALUMINIUM TUBULAR BALUSTRADE

www.ozwestfencing.com

Aluminum Tubular Balustrade

i TB1 - VERTICAL TUBE BALUSTRADE



STANDARD SPECIFICATIONS

- 50 X 25mm Top Rail**
- 50 X 25mm Bottom Rail**
- 40 x 40mm Posts
(Punched through bottom rail)**
- 16mm Round Tubes**
- Max Tube Spacings - 120mm**
- Max Post Centres - 1500mm**
- Post & Rail Wall Thickness - 3mm**
- Tube Wall Thickness - 1.2mm**
- Top Rail Spacings - 100mm**
- 100mm Leg through Bottom Rail
w/ 110 x 50mm Flange Plate
No Flange Plate optional**

Rail Options Available

- 50 x 25mm (Std)**
- 50 x 50mm
- 50mm Round
- 60mm Round
- 70 x 30mm Oval

Rail Fixings Required


- 50 x 25mm Shrouds (Std)**
- 50 x 50mm Shrouds
- 50mm Round Shrouds
- 60mm Round Shrouds
- 70 x 30mm Oval Shrouds

Picket Options Available

- 16mm Round (Std)**
- 19mm Round
- 19mm Square

i Custom Balustrade options are available for special order. Please contact our office for more information.

i TB2 - VERTICAL slat BALUSTRADE

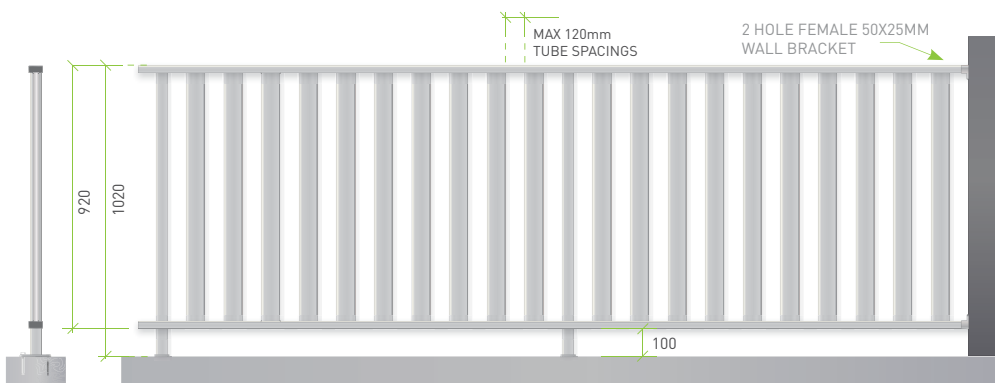

STANDARD SPECIFICATIONS

- 50 X 25mm Top Rail**
- 50 X 25mm Bottom Rail**
- 40 x 40mm Posts
(Punched through bottom rail)**
- 65 x 16mm Slats**
- Max Tube Spacings - 120mm**
- Max Post Centres - 1500mm**
- Post & Rail Wall Thickness - 3mm**
- Tube Wall Thickness - 1.4mm**
- Top Rail Spacings - 100mm**
- 100mm Leg through Bottom Rail
w/ 110 x 50mm Flange Plate
No Flange Plate optional**

Rail Options Available

- 50 x 25mm (Std)**
- 50 x 50mm
- 70 x 30mm Oval

Rail Fixings Required

- 50 x 25mm Shrouds (Std)**
- 50 x 50mm Shrouds
- 70 x 30mm Oval Shrouds

Slat Options Available

- 65 x 16mm Slat (Std)**
- 90 x 16mm Slat
- 40 x 16mm Slat

i Custom Balustrade options are available for special order. Please contact our office for more information.

Aluminum Tubular Balustrade

i TB3 - VERTICAL TUBE D.T.R. BALUSTRADE



STANDARD SPECIFICATIONS

- 50 X 25mm Top Rails**
- 50 X 25mm Bottom Rail**
- 40 x 40mm or 40mm Rnd Posts (Punched through bottom rail)**
- 16mm Round Tubes**
- Max Tube Spacings - 120mm**
- Max Post Centres - 1500mm**
- Post & Rail Wall Thickness - 3mm**
- Tube Wall Thickness - 1.2mm**
- Top Rail Spacings - 100mm**
- 100mm Leg through Bottom Rail - Flange Plate optional**

Rail Options Available

- 50 x 25mm (Std)**
- 50 x 50mm
- 50mm Round
- 60mm Round
- 70 x 30mm Oval

Rail Fixings Required


- 50 x 25mm Shrouds (Std)**
- 50 x 50mm Shrouds
- 50mm Round Shrouds
- 60mm Round Shrouds
- 70 x 30mm Oval Shrouds

Picket Options Available

- 16mm Round (Std)**
- 19mm Round
- 19mm Square

i Custom Balustrade options are available for special order. Please contact our office for more information.

i TB4 - VERTICAL slat D.T.R. BALUSTRADE

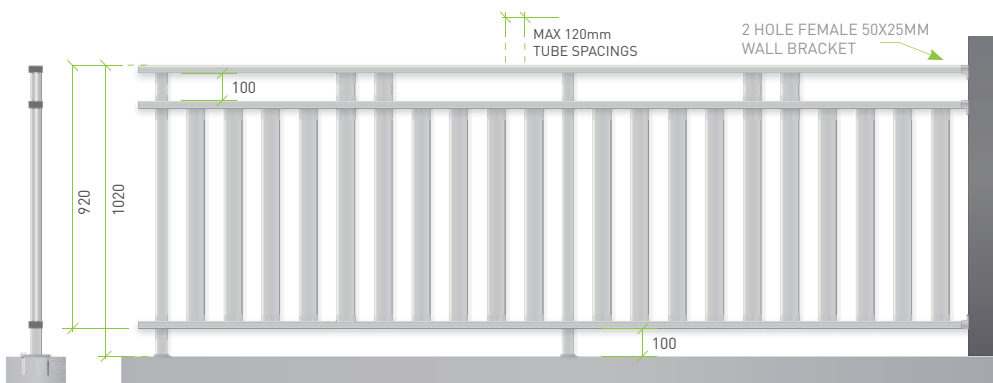

STANDARD SPECIFICATIONS

- 50 X 25mm Top Rails**
- 50 X 25mm Bottom Rail**
- 40 x 40mm Sqr Posts (Punched through bottom rail)**
- 65 x 16mm Slats**
- Max Tube Spacings - 120mm**
- Max Post Centres - 1500mm**
- Post & Rail Wall Thickness - 3mm**
- Slat Wall Thickness - 1.4mm**
- Top Rail Spacings - 100mm**
- 100mm Leg through Bottom Rail - Flange Plate optional**

Rail Options Available

- 50 x 25mm (Std)**
- 50 x 50mm
- 70 x 30mm Oval

Rail Fixings Required

- 50 x 25mm Shrouds (Std)**
- 50 x 50mm Shrouds
- 70 x 30mm Oval Shrouds

Slat Options Available

- 65 x 16mm Slat (Std)**
- 90 x 16mm Slat
- 40 x 16mm Slat

i Custom Balustrade options are available for special order. Please contact our office for more information.

Aluminum Tubular Balustrade



Care Instructions & Warranty:

Exposure to U.V. light, pollution, salt deposits and chemicals can affect the long term performance of the fencing coating if not removed with regular washing.

A regular monthly clean with a soft brush, warm water and mild detergent followed by a rinse of fresh water will maintain the finish of both powder coated, Colorbond® Steel and stainless steel fencing components and fulfil warranty conditions.

Disclaimer: Drawings not to scale. © Copyright 2014.

10 Year
Warranty
Conditions Apply